

XTRAFoAM™ HH

H A N D H E L D A D H E S I V E F O A M

XtraFoam™ Hand Held Straw Foam is a very low expanding, one-component, multipurpose, polyurethane foam specially formulated to seal around window, doors, insulation areas and where air infiltration occurs. The low pressure, airtight insulation foam blocks drafts, moisture and insects without bowing the windows. It is environmentally safe, contains no CFC's or HCFC's.

FEATURES

- Low Expansion Formula
- Straw Foam
- Excellent stability (no shrink or post expansion)
- Very good filling capacities
- Provides water-resistant, airtight seal
- Excellent adhesion to various substrates
- High thermal and acoustical resistance

APPLICATIONS

- Windows & Doors
- Insulation
- Pipes
- Electrical Panels
- Areas of air infiltration



SPECIFICATIONS

Base	Polyurethane
Curing System	Moisture Cure
Core Density.....	1.25 -1.70 lbs./ cu.ft.
R-Value ASTM C518	4.25 per inch
Pressure Build	0.15-1.20 psi
Color	Yellow
Service Temp.....	230 Degrees F
Curing Rate	30 Minutes for a 1/2 bead
Take Free.....	5-10 minutes for a 1/2 bead
Shelf Life	12 months, from date of mfg.



Proud Member

866-512-GLUE
WWW.PREMIERINDUSTRIAL.NET



PREMIER
INDUSTRIAL SUPPLY

XTRAF OAM™

H A N D H E L D A D H E S I V E F O A M

APPLICATION:

Type: ALL substrates except PE, PP. State of Surface: clean, free of dust and grease. Preparation: Moistening of the surfaces improves adhesion, curing and denser cellular structure.

Be sure to follow directions for can & straw insert. The foam sealant flow can be controlled by tilting the one piece straw adapter with the valve pointing downwards. By activating the adapter lever carefully, the flow rate can be controlled. Foam application can be halted when needed, as shown in the instructions.

USAGE:

	LINEAR FEET									
	500	1,000	1,500	2,000	2,500	3,000	3,500	4,000	4,500	5,000
1/4" (6.3 mm)	1	1	1	1	2	2	2	2	3	4
3/8" (9.5 mm)	1	2	2	3	4	4	5	6	6	7
1/2" (12.7 mm)	2	3	4	5	6	7	8	10	11	12
	152	305	457	610	762	914	1067	1219	1372	1524

LINEAR METERS

PACKAGING:


12oz Aerosol Can. 12 cans per case.

SHELF-LIFE:

12 months in unopened packaging in a cool and dry storage place at temperatures of 75 deg. F. Please note that XtraFoam must be stored in the upright position.

HEALTH AND SAFETY RECOMMENDATION:

Apply the standard industrial hygiene techniques. Wear gloves and safety goggles. Remove cured foam by mechanical means only, never burn away. SEE INDIVIDUAL CANS OF FOAM FOR SPECIFIC INSTRUCTIONS.

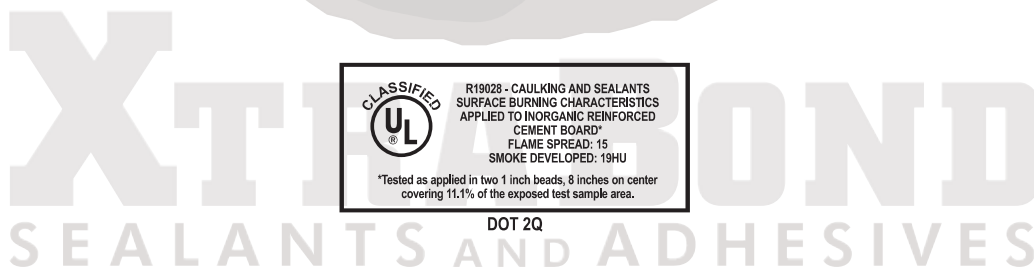

LIMITED LIFETIME WARRANTY

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Premier Industrial Supply, Inc. (Premier) is limited to a full refund of the purchase price or product replacement if product is proven defective. Premier shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.



866-512-GLUE
www.xtrabond.com

REV. 2/09 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

distributed by:

